iCHAIR MC3

1.612

Allowed user weight

150 kg with seat lift CODE 27 (incl. additional load)

160 kg (incl. additional load)



MEYRA GROUP



Serviceability: Easy battery maintenance thanks to pull-out battery case



300 mm seat lift



Long-life LED lighting



All-wheel suspension

Design meets function

EFFICIENCY

- Effectiveness through simple maintenance and a high level of service friendliness
- Little need for repairs by implementing high value and durable parts
- Modular structure of the iChair-family enables compatibility of parts and parts groups
- Numerous adjustment options allow individual adaptation
- Simplified reinstallment through perfect user size limitations, as for example a standard user weight of 160 kg

THERAPEUTIC BENEFIT

- Ideal for retaining mobility at home, at the desk or in the office
- Effective pressure relief and relaxing positioning for long term sitting, through large electric adjustment sectors
- Different seat systems according to the individual demands
- Ideal driving comfort for long distances through serial all-wheel suspension
- The stable 300 mm seat lift supports the mobilisation and social integration of the user

FIELD OF USE

- For indoor and outdoor use
- For permanent and all-day use for independent mobility, also with extreme functional limitations
- For working and active people, who need one wheelchair for different everyday situations
- Suited for outdoors through serial large tyres
- Indoor spaces can easily be mastered due to the compact dimensions and high level of agility

● ORDER ○ COST ESTIMATE ○ CUSTOM DESIGN

Please send the order form by e-mail to: info@meyragroup.com **Customer service:** +49 571 93292 555

Billing address / Customer ref. no.:

Delivery address:

Tax-ID

Consignment / Comments:

Order quantity:

MEYRA



Allowed user weight

150 kg with seat lift CODE 27 (incl. additional load)
160 kg (incl. additional load)

Hints

Our Terms and Conditions as stated at www.meyra.de/AGB shall apply
You can find information on the measurement process at www.meyra.de/messverfahren

Valid from 01.01.2026 – 31.12.2026.
Errors, misprints and changes reserved.

Use our K.I.S.S.S. for orders and configurations at www.kisss-by-meyra.de
You avoid queries and incorrect orders thanks to the buildability check

EPOWER

USER DATA

First name

Name

Street

ZIP CODE

City

Country

Birthday

Diagnosis 1

Diagnosis 2

Tel.

Mobil

E-mail

Order number

Health insurance fund / cost unit

Specialist trade Contact person/phone.

Supply specialist MEYRA

Approval info from week

ANATOMICAL DATA (IN MM)

1) Seat depth

2) Seat width

3) Chest width

4) Chest depth

5) Elbow height

6) Armpit height

7) Back height


8) Head height

9) Forearm length

10) LLL

Body height

Weight (kg)

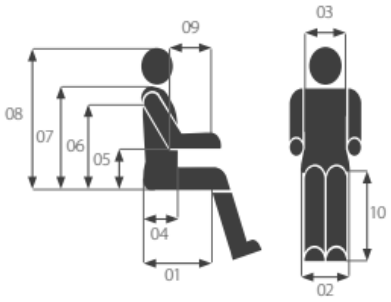

Remarks

❑ I accept the Terms and Conditions of Meyra Distribution GmbH (valid as of January 2023)
https://www.meyra.com/gtc/

Date

City

Signature

EPOWER

Technical specifications

Seat widths in mm	380 - 650
Seat depth in mm	400 - 560/400 - 560/500/480 - 530
Back support height in mm	450 - 500 / 530 - 570 / 640 / 640
Lower shank length in mm	280 - 430/350 - 500/350 - 500/350 - 500
Arm support height in mm	240 - 350/180 - 290/140 - 250/180 - 290
Front seat height in mm	460 - 520/530 - 590/580 - 640/610 - 670
Length with footrest in mm	1170
Length without footrests in mm	870
Width ready to drive in mm from	630
Height without head support in mm	970 - 1140
Transport length in mm	870
Transport height in mm	590
Front wheel size in mm	260 x 70 (10")
Rear wheel size in mm	356 x 75 (14")
Max. obstacle height in mm	70
Turning radius in mm	900
Max. range in km with 38 Ah (5 h), 45 Ah (20h) battery	25 - 30
Range with battery 63 Ah (5h), 80 Ah (20h)	35 - 40
Transport empty weight basic configuration min.	108 kg
User weight	160 kg
Permitted overall weight incl. options	320 kg
Max. additional loading	10 kg
Driving speed	6 / 10 km/h
Motor power	2 x 220 / 2 x 300
Range	43 Ah(5h) / 50 Ah(20h) max. 25-30 km / 63 Ah (5h), 73 Ah (20h) max. 35-40 km
Permitted inclination/slopes	8,5° (15%)
Form of steering	indirect
Seat camber electric	-2° to 33°
Seat camber mechanical	0° to 10°
Electrically adjustable backrest angle	80° - 140° (Code 25)
Mechanical backrest angle	80° - 120° (Code 401)
Seat lift electric	300 mm

Technical data *** continued

Drive	Rear

☐ Please select by ticking the relevant boxes
Standard version: If no other selection is made, the standard version will be delivered.
S Special construction/individual solution o.r. - on request

00 Chassis/Motorisation

	CODE	SPEED	RANGE	MOTOR POWER
❑	115	6 km/h	max. 40 km	2 x 220 W
❑	115/903	6 km/h ⚠ *only in combination with R-Net CODE 702 (120 A)*	max. 40 km	2 x 300 W (reinforced)
❑	117	10 km/h	max. 35 km	2 x 300 W
❑	117/903	10 km/h ⚠ *only in combination with R-Net CODE 702 (120 A)*	max. 35 km	2 x 350 W (reinforced)

Chassis options

	CODE	DESCRIPTION
❑	892	Standard suspension for user weight up to 120 kg
❑	891	Standard suspension for client weight up to 160 kg

01 Seat width (SW)

	CODE	DESCRIPTION	SEAT SURFACE WIDTH
❑	38	SW continuously adjustable from 380 to 500 mm through the arm supports ⚠ *not in combination with ErgoSeatPRO CODE 2019*	380 mm
❑	43	SW continuously adjustable from 430 to 550 mm through the arm supports	430 mm
❑	48	SW continuously adjustable from 480 to 600 mm through the arm supports ⚠ *Not in conjunction with FSH 460 mm*	480 mm
❑	53	SW continuously adjustable from 530 to 650 mm through the arm supports ⚠ *Not in conjunction with ErgoSeatPRO CODE 2019* *Not in conjunction with FSH 460 mm*	530 mm

02 Front seat height (FSH) in combination with castor wheel (without seat cushion)

				Front Seat Height (FSH) in mm		
Code	Ø	rim	Tyres	460	490	520
142/146	10"	Aluminium rim	Puncture protected pneumatic tyres	❑	❑	❑
142/900	10"	Aluminium rim	Puncture-proof tyres	❑	❑	❑

EPOWER

☐ Please select by ticking the relevant boxes
Standard version: If no other selection is made, the standard version will be delivered.
S Special construction/individual solution o.r. - on request

Steering wheel options

	CODE	DESCRIPTION
❑	816	Mud guard for Castor wheels

03 Drive wheels

		Puncture protected pneumatic tyres	Puncture-proof tyres
Code	Ø Rim	CODE 846	CODE 904
460	14" alloy rim	❑	❑

Rear wheel options

	CODE	DESCRIPTION
❑	824	Mudguard for drive wheels, Curved

04 Tyre colour

	CODE	DESCRIPTION
❑	908	black
❑	909	grey

05 Seat Tilt

	CODE	DESCRIPTION	SEAT ANGLING/LIFT
❑	119	Mechanic seat tilt, in steps	0° to +10°
❑	118	Electric seat tilting continuously by 35 degrees	-2° to +33°

Seatlift

	CODE	DESCRIPTION
❑	27	Electric seat lift 150 kg ⚠ *Only i.c.w. operating module R-NET CODE 702*

EPOWER

☐ Please select by ticking the relevant boxes
S Special construction/individual solution o.r. - on request
Standard version: If no other selection is made, the standard version will be delivered.

06 Seat depth (SD)

	(C-615)	(C-788)	(C-619)	(C-792)	(C-793)	(C-356)
	400 mm	430 mm	460 mm	490 mm	530 mm	560 mm
Seat depth (SD)	❑	❑	❑	❑	❑	❑

07 Seat system

	CODE	DESCRIPTION
❑	561/4276	Seat cushion
❑	4276	Seat plate without cushion
❑	948	Ergo Seat cushion
❑	7206	Netti Uno Seat cushion
❑	7203	Netti Sit cushion

⚠ *Netti and Ride not i.c. with SD 560 mm*

☐ Please select by ticking the relevant boxes
Standard version: If no other selection is made, the standard version will be delivered.
S Special construction/individual solution o.r. - on request

08 Back systems

	CODE	DESCRIPTION	BACK HEIGHT
❑	608	Round tube back posts, 22 mm, incl. continuous push bar ⚠ *prepared for external back systems*	
❑	735	Tension adjustable back strap without padding/back cover.	500 mm, convertible to 450 mm
❑	736	Tension adjustable back strap with padding / back cover.	500 mm, convertible to 450 mm
❑	949	ErgoSeat back,	590 mm, convertible to 630 mm
❑	2019	ErgoSeat Pro comfort back including overlay cushion ⚠ *Only i.c. with SW 430 and 480 mm*	590 mm, convertible to 630 mm
❑	7201	Netti Uno Back rest	620 mm, convertible to 670 mm
❑	7209	Netti Smart Back rest	620 mm, convertible to 670 mm
❑	221/7207	Netti Stabil Back rest	620 mm
❑	638/7207	Netti Stabil Back rest	670 mm
❑	221/7210	Netti Super Stabil Back rest	620 mm
❑	638/7210	Netti Super Stabil Back rest	670 mm
❑	7205	Netti Kyphotic Back rest ⚠ *Not in conjunction with SW 530 mm*	620 mm, convertible to 670 mm

09 Optional seat units

		Backrest	
CODE	Seat unit	mechanical	electric
961	ERGOSTAR anatomically formed seat system	❑	
579/567	RECARO S/F short seat with little side surface	❑	❑
580/578	RECARO M/W long seat with very long side bolsters	❑	❑
581/584	RECARO L/X long seat with pronounced lateral guidance	❑	❑

⚠ *ERGOSTAR seat CODE 961 is only possible with seat width 48 cm*

EPOWER

☐ Please select by ticking the relevant boxes
Standard version: If no other selection is made, the standard version will be delivered.
S Special construction/individual solution o.r. - on request

08 ErgoSeat-covers

	CODE	DESCRIPTION
❑	237	ErgoSeat-cover, textile, black-grey plaid
❑	4980	ErgoSeat-cover, incontinenc, black

ErgoSeatPRO accessory back

	CODE	DESCRIPTION	Mass in mm (H X W Inside/Outside x D)
❑	2021	Thorax cushions, pair, large	310 x 125/70 x 140
❑	2032	Thorax cushions, pair, small	230 x 120/60 x 125

09 Recaro remuneration

	CODE	DESCRIPTION
❑	235	Recaro cover, textile, black

10 Back support options (Adjustments)

	CODE	DESCRIPTION
❑	814	Continuous push bar
❑	410	Single push handles incl. stabiliser bar
❑	2814	Continuous push bar for RECARO seat systems ⚠ *only in combination with RECARO*
❑	913	Head support, synthetic leather black
❑	589	Shoulder Harness
❑	401	Mechanical backrest recline
❑	25	Powered backrest recline

☐ Please select by ticking the relevant boxes
S Special construction/individual solution o.r. - on request
Standard version: If no other selection is made, the standard version will be delivered.

11 Arm Supports and Arm Pads

1 = detachable 2 = height adjustable 3 = width adjustable 4 = depth adjustable

	CODE	DESCRIPTION	FUNCTIONS
❑	106	Single post arm support with upholstered arm pad and black clothes guard	1,2,3,4
❑	4960	Single post arm support with upholstered arm support, satined clothes guard and slight depression in the padded arm support	1,2,3,4
❑	21	Single post arm support with upholstered arm support, satined clothes guard and long angled padded arm support	1,2,3,4
❑	24	Arm support with padded arm support, swivelling and angle adjustable Differing arm support height 190 - 230 mm ⚠ *Only i.c. with operating module bracket CODE 4859*	
❑	14	Flip up armrests mounted on the back posts, adjustable in width, height and angle	
❑	769	Satined clothes guard without arm support ⚠ *only i.c. with arm support CODE 24*	
❑	4422	Armrest fixation in basic position ⚠ *only i.c.w. armrest CODE 14*	

Armrest hemiplegia

	CODE	DESCRIPTION	
❑	4982	Hemiplegia forearm rest, swing-away a. height adjustable ⚠ *not in combination with CODE 24 armrest swiveling up*	For Unteramlänge to middle of the hand 36cm +/- 2cm
❑	4983	Extension for hemiplegia forearm shell ⚠ *only in combination with CODE 4983 Hemi forearm tray*	For forearm length to middle of hand 43cm +/- 2cm

Hand Rest Hemiplegia

	CODE	DESCRIPTION
❑	4985	Hemi hand rest flat
❑	4987	Hemi hand rest with ergonomic handle on the left
❑	4986	Hemi hand rest with ergonomic handle on the right

☐ Please select by ticking the relevant boxes
Standard version: If no other selection is made, the standard version will be delivered.
S Special construction/individual solution o.r. - on request

12 Leg supports

	CODE	DESCRIPTION
❑	93	80° Legrests, detachable and swing-away
❑	92	Elevating Leg supports, (manual) , removable and swing-away ⚠ *not i.c.w.footrest CODE 54*
❑	86	Powered Elevating Legrests, removable and swing-away ⚠ *only i.c.w. operating module R-NET CODE 702* *not i.c.w. footrest CODE 54*

13 Footrests

	CODE	DESCRIPTION	depth	LLL
❑	54	One Piece footrest, 60 mm depth adjustable (in 4 steps), flip-up, height and angle adjustable ⚠ *Only i.c.w. legrest Code 93*	150 mm	280-430mm
❑	798	Two-piece footrest flip up, height and angle adjustable	150 mm	280-430mm
❑	105	Footboard adapter: abduction +/- 45 mm per side		
❑	822	Toe strap (pair)		
❑	823	Heel Loops (pair)		

14 Batteries and Chargers

	CODE	DESCRIPTION	RANGE
❑	5159	Maintenance free batteries approx. 43 Ah (5h), 50 Ah (20h)	25 km
❑	5158	Maintenance-free batteries approx.66 Ah (5h), 80 Ah (20h)	40 km
❑	732	Charger 8 A for 50 Ah(20h)	
❑	733	Charger 12A recommended for 80 Ah (20 h)	

15 Lighting

	CODE	DESCRIPTION
❑	932	Active LED-lighting front and rear acc. to StVZO

☐ Please select by ticking the relevant boxes
Standard version: If no other selection is made, the standard version will be delivered.
S Special construction/individual solution o.r. - on request

16 Joystick modules and accessories

		CONTROL			
Code	Control modules	none	2 / 682	6 / 678	8 / 780
408	VR2	❑	❑		
702/415	R-NET LED			❑	
702/416	R-NET LCD			❑	
702/398	R-NET LCD IR/BT			❑	
702/839	R-NET OMNI II			❑	

⚠ *Code 839 OMNI II Flashing function and horn function only selectable via menu*

Options

	CODE	DESCRIPTION
❑	918	ESP - Driving stabilization module ⚠ *only in conjunction with R-Net / LCD color display or i.V.m. OMNI II (CODE 839)*

Joystick Location

	CODE	DESCRIPTION	CONTROLS
❑	74	Assembly right	
❑	60	Assembly left	

17 Joystick Mount

	CODE	DESCRIPTION
❑	4859	Joystick bracket, length adjustable
❑	4566	Joystick bracket, length and height adjustable
❑	4860	Joystick bracket, length and height adjustable, swivelling to the side (e.g. on a table)
❑	4874	Protection bar for Joystick VR2 and R-NET
❑	851	Joystick bracket for accompanying person (operating module can be moved from the front to the rear) ⚠ *Only i.c.w. continuous pushing bar CODE 814*

☐ Please select by ticking the relevant boxes
Standard version: If no other selection is made, the standard version will be delivered.
S Special construction/individual solution o.r. - on request

18 Special operating modules

	CODE	DESCRIPTION
❑	4660	Table plate with recess (centred) for operating module, swivelling to the right
❑	4661	Table plate with recess (centred) for operating module, swivelling to the left
❑	4789	Additional control module with priority function for attendant ⚠ *incl. mounting on Back tube*

External on/off switch

for users who can hardly operate the keys of the operating module or as an emergency/off function for accompanying person

	CODE	DESCRIPTION
❑	596	External on/off switch, diameter 63 mm, yellow
❑	778	External on/off switch, diameter 30 mm, green
❑	779	External on/off switch, diameter 30 mm, yellow

⚠ *Only i.c.w. joystick module R-NET with LED-Display CODE 702/416 or OMNI II Surround control CODE 839*

Others

	CODE	DESCRIPTION
❑	4612	MicroGuide way joystick ⚠ *only in combination with R-NET OMNI II CODE 702/839* *temporarily not available*
❑	4601	MicroGuide way joystick including bracket and hand pad ⚠ *only in combination with R-NET OMNI II CODE 702/839* *temporarily not available*

☐ Please select by ticking the relevant boxes
S Special construction/individual solution o.r. - on request
Standard version: If no other selection is made, the standard version will be delivered.

Joystick attachments

	CODE	DESCRIPTION
❑	553	Tetra-fork vertical
❑	556	Tetra-fork horizontal
❑	734	Tetra-fork horizontal, adjustable to hand width
❑	4589	Mushroom grip
❑	4590	Ball grip
❑	4591	T-grip
❑	4593	Stem grip
❑	4594	Button grip
❑	4595	Softball
❑	4596	Golf ball d=43 mm

19 software

	CODE	DESCRIPTION
❑	985	Series programming (standard)
❑	998	Special programming (deviation from standard)

20 Frame Colours

	CODE	FRAME	AKZENTE
❑	207	Matt black	
❑	212	Matt black	Polar white
❑	186	Matt black	Magic Blue
❑	227	Matt black	Red metallic
❑	180	Matt black	Lemon reflex
❑	214	Matt black	Sun yellow

☐ Please select by ticking the relevant boxes
Standard version: If no other selection is made, the standard version will be delivered.
S Special construction/individual solution o.r. - on request

21 Options around the wheelchair

	CODE	DESCRIPTION
❑	906	Rear-view mirror right
❑	927	Rear-view mirror left
❑	970	Crutch holder
❑	4795	Anti-theft function, key ⚠ *only i.c. with R-Net*
❑	589	Shoulder Harness
❑	833	Safety belt (metal buckle)
❑	721	Lap belt - buckle
❑	4646	Therapy table swivelling sideways
❑	590	Abduction wedge ⚠ *Only i.c.w. ErgoSeat CODE 948 or seat plate CODE 4276*
❑	260	Memory-function for head support
❑	957	Lateral / Torso supports, Rigid(pair)
❑	954	Lateral / Torso supports, swing away (pair) ⚠ *Not i.c.w. arm supports CODE 24*
❑	781	USB charging socket
❑	782	Receptacle for mobile phone bracket ⚠ *Universal adapter for mounting mobile phone holders not in conjunction with OMNI II environmental contro*
❑	2721	Adapter set for DAHL docking station ⚠ *Wheelchair adapter set for preparation of Dahl docking station*
❑	969	Baggage rack with satined surface, transparent
❑	994	Baggage rack with metal rods
❑	2676	Warning sign sticker
❑	676	Rear marking plate

22 Service

	Item	DESCRIPTION
❑	55704	Flat fee for customised parameterisation (not eligible for discounts) ⚠ *The on-the-spot service covers only simple adjustment of parameter sets, such as acceleration, speed etc.*