iCHAIR MC FRONT

1.613

Allowed user weight

140 kg with seat lift CODE 27 (incl. additional load)

160 kg (incl. additional load)



MEYRA GROUP



The central leg support makes a 90° knee angle possible



14" drive wheels front



Various optional seating systems



High degree of manoeuvrability due to compact dimensions

Full speed ahead

EFFICIENCY

- Effectiveness through simple maintenance and a high level of service friendliness
- Little need for repairs by implementing high value and durable parts
- Modular structure of the iChair-family enables compatibility of parts and parts groups
- Numerous adjustment options allow individual adaptation
- Simplified reinstallment through perfect user size limitations, as for example a standard user weight of 160 kg

THERAPEUTIC BENEFIT

- The central leg support makes a 90° knee angle possible
- Ideal for retaining mobility at home, at the desk or in the office
- Effective pressure relief and relaxing positioning for long term sitting, through large electric adjustment sectors

FIELD OF USE

- For indoor and outdoor use
- For permanent and all-day use for independent mobility, also with extreme functional limitations
- For working and active people, who need one wheelchair for different everyday situations
- Suitable for outdoor use through large serial tyres and optionally available 10 km/h-version
- Indoor spaces can easily be mastered due to the compact dimensions and high level of agility

● ORDER ○ COST ESTIMATE ○ CUSTOM DESIGN

Please send the order form by e-mail to: info@meyragroup.com **Customer service:** +49 571 93292 555

Billing address / Customer ref. no.:

Delivery address:

Tax-ID

Consignment / Comments:

Order quantity:

MEYRA



Standard configuration

- Batteries
- Battery charger
- Leg supports, removable and swivelling
- Standard side panel

Allowed user weight

140 kg with seat lift CODE 27 (incl. additional load)
160 kg (incl. additional load)

Hints

Our Terms and Conditions as stated at www.meyra.de/AGB shall apply
You can find information on the measurement process at www.meyra.de/messverfahren

Valid from 01.01.2026 – 31.12.2026.
Errors, misprints and changes reserved.

Use our K.I.S.S.S. for orders and configurations at www.kisss-by-meyra.de
You avoid queries and incorrect orders thanks to the buildability check

EPOWER

USER DATA

First name

Name

Street

ZIP CODE

City

Country

Birthday

Diagnosis 1

Diagnosis 2

Tel.

Mobil

E-mail

Order number

Health insurance fund / cost unit

Specialist trade Contact person/phone.

Supply specialist MEYRA

Approval info from week

ANATOMICAL DATA (IN MM)

1) Seat depth

2) Seat width

3) Chest width

4) Chest depth

5) Elbow height

6) Armpit height

7) Back height


8) Head height

9) Forearm length

10) LLL

Body height

Weight (kg)

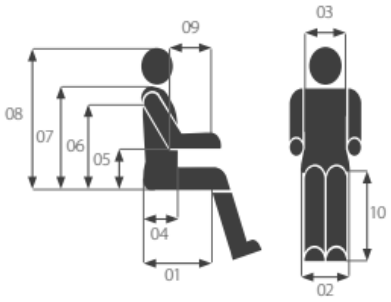

Remarks

❑ I accept the Terms and Conditions of Meyra Distribution GmbH (valid as of January 2023)
https://www.meyra.com/gtc/

Date

City

Signature

EPOWER

Technical specifications

1) see category seat width
2) to seat pan without cushion
3) without legrests and without armrests
4) with adjustable back
5) seating Systems: Standard / ErgoSeat / Recaro
6) see category leg and footrests

Seat widths in mm	380 - 650 [1]
Seat depth in mm	400 - 560 / 400 - 560 / 480 - 530 [5]
Back support height in mm	450 - 500 / 530 - 570 / 640 [5]
Lower shank length in mm	280 - 430 / 330 - 450 [2] [6]
Arm support height in mm	240 - 350 [2]
Front seat height in mm	440 - 510 [2]
Seat height with Code 27 seat lift	460 - 760 [2]
Length with footrest in mm	1065 - 1130
Length without footrests in mm	910
Width ready to drive in mm from	630
Height without head support in mm	960 - 1080 [4]
Transport length in mm	910
Transport height in mm	610
Front wheel size in mm	352 x 75 (14")
Rear wheel size in mm	230 x 70 (9")
Max. obstacle height in mm	60
Turning radius in mm	650
Max. range in km with 38 Ah (5 h), 45 Ah (20h) battery	max. 25 km
Range with battery 63 Ah (5h), 80 Ah (20h)	max. 40 km
Transport weight	108 kg [3]
User weight	140 kg with seat lift, max. 160 kg for SD 46, max. 140 kg for SD 49/53, max. 100 kg for SD 40/43
Permitted total weight in kg	280 kg
Max. additional loading	10 kg
Driving speed	6 km/h / 10 km/h
Motor power	2 x 220 W / 2 x 300 W
Permitted inclination/slopes	6° (11%)
Form of steering	indirect
Seat camber electric	4° - 26° / 0° - 50°
Seat camber mechanical	4° - 10°
Back support angle electric	80° - 140° (Code 25)

Technical data *** continued

Back support angle mechanical	80° - 120° (Code 401)
Drive	Front

☐ Please select by ticking the relevant boxes
Standard version: If no other selection is made, the standard version will be delivered.
S Special construction/individual solution o.r. - on request

00 Chassis/Motorisation

	CODE	SPEED	RANGE	MOTOR POWER
❑	115	6 km/h	max. 40 km	2 x 220 W
❑	117/918	10 km/h incl. ESP-driving stability module (GYRO) ⚠ *Not in combination with R-NET LED CODE 702/415* *Not in combination with VR-Control CODE 408* *Only in combination with CODE Safety belt with lock 833* *Only in combination with TÜV-Gutachten CODE 4772*	max. 35 km	2 x 300 W

Chassis options

	CODE	DESCRIPTION
❑	892	Standard suspension for user weight up to 120 kg
❑	891	Reinforced suspension for user weight 120 - 160 kg

01 Seat width (SW)

	CODE	DESCRIPTION	SEAT SURFACE WIDTH
❑	38	SW continuously adjustable from 380 to 500 mm through the arm supports	380 mm
❑	43	SW continuously adjustable from 430 to 550 mm through the arm supports	430 mm
❑	48	SW continuously adjustable from 480 to 600 mm through the arm supports	480 mm
❑	53	SW continuously adjustable from 530 to 650 mm through the arm supports	530 mm

⚠ *I.c.w. ErgoSeat Pro only SW 430 and 480 mm possible*
With RECARO the real seat width is approx. 500 mm
Overview of RECARO seats on request

☐ Please select by ticking the relevant boxes
S Special construction/individual solution o.r. - on request
Standard version: If no other selection is made, the standard version will be delivered.

02 Front seat height (FSH) in combination with castor wheel (without seat cushion)

FSH measured at 4° seat inclination, upper edge of seat plate

				Front Seat Height (FSH) in mm		
Code	**Ø**	**rim**	**Tyres**	**440**	**480**	**510**
163/146	9"	Aluminium rim	Puncture protected pneumatic tyres	❑	❑	❑
163/900	9"	Aluminium rim	Puncture-proof tyres	❑	❑	❑

⚠ *Only VSH 480 mm is possible in conjunction with C. 27 or c. 4118*

Steering wheel options

	CODE	DESCRIPTION
❑	816	Mud guard for Castor wheels

03 Drive wheels

				Puncture- resistant pneumatic tyres CODE 846		Puncture proof tyre CODE 904	
Code	**Ø**	**rim**		**grey**	**black**	**grey**	**black**
460	14"	Aluminium rim		❑	❑	❑	❑

Rear wheel options

	CODE	DESCRIPTION
❑	824	Mudguard for drive wheels, Curved

EPOWER

☐ Please select by ticking the relevant boxes
Standard version: If no other selection is made, the standard version will be delivered.
S Special construction/individual solution o.r. - on request

05 Seat tilting/seat lift

The adjustment area may vary by max. +/- 3° depending on the seat height and size of the steering wheels.

	CODE	DESCRIPTION	SEAT TILT/LIFT
❑	119	Mechanical seat tilting	4° to +10°
❑	118	Electric seat tilt, infinitely variable by 22° ⚠ *Only in combination with adjustment module VR2 CODE 682*	4° to +26°
❑	27	Cross-lift 300 mm lift incl. tilting ⚠ *Only in conjunction with R-Net CODE 702* *only in conjunction with VSH 480 mm*	0° to +30°
❑	4118	Electric tilt-in-space, stepless by 50° ⚠ *The seat depth 56 cm CODE 356 is not possible in combination with ErgoSeat backrest CODE 949* *only in conjunction with CODE 833 retaining strap with lock* *only in conjunction with VSH 480 mm*	0° - 50°

06 Seat depth (SD)

	(C-615)	(C-788)	(C-619)	(C-792)	(C-793)	(C-356)
	400 mm	430 mm	460 mm	490 mm	530 mm	560 mm
Seat depth (SD)	❑	❑	❑	❑	❑	❑

⚠ *CODE 615 Seat-depth 400 mm only in conjunction with CODE 5158 maintenance-free batteries approx. 66 Ah (5h), 80 Ah (20h)*

07 Seat system

	CODE	DESCRIPTION
❑	561/4276	Seat cushion
❑	4276	Seat plate without seat cushion
❑	948	Ergo Seat cushion
❑	7206	Netti Uno Seat cushion
❑	7203	Netti Sit cushion

☐ Please select by ticking the relevant boxes
S Special construction/individual solution o.r. - on request
Standard version: If no other selection is made, the standard version will be delivered.

08 Back systems

	CODE	DESCRIPTION	BACK HEIGHT
❑	608	Round tube back posts, 22 mm, incl. continuous push bar ⚠ *prepared for external back systems*	
❑	287/735	Tension adjustable back strap without padding/back cover.	500 mm, convertible to 450 mm
❑	287/736	Tension adjustable back strap with padding / back cover.	500 mm, convertible to 450 mm
❑	949	ErgoSeat back,	590 mm, convertible to 630 mm
❑	2019	ErgoSeat Pro comfort back including overlay cushion	590 mm, convertible to 630 mm
❑	7201	Netti Uno Back rest	620 mm, convertible to 670 mm
❑	7209	Netti Smart Back rest	620 mm, convertible to 670 mm
❑	221/7207	Netti Stabil Back rest	620 mm
❑	638/7207	Netti Stabil Back rest	670 mm
❑	221/7210	Netti Super Stabil Back rest	620 mm
❑	638/7210	Netti Super Stabil Back rest	670 mm
❑	7205	Netti Kyphotic Back rest	620 mm, convertible to 670 mm

Optional seat units incl. headrest

		Backrest	
CODE	Seat unit	mechanical	electric
579/567	RECARO S/F short seat with little side surface	❑	❑
580/578	RECARO M/W long seat with very long side bolsters	❑	❑
581/584	RECARO L/X long seat with pronounced lateral guidance	❑	❑

ErgoSeat-covers

	CODE	DESCRIPTION
❑	237	ErgoSeat-cover, textile, black-grey plaid
❑	4980	ErgoSeat-cover, incontinenc, black

☐ Please select by ticking the relevant boxes
Standard version: If no other selection is made, the standard version will be delivered.
S Special construction/individual solution o.r. - on request

ErgoSeatPRO Comfort Back Accessories

	CODE	DESCRIPTION	Mass in mm (H X W Inside/Outside x D)
❑	2021	Thorax cushions, pair, large ⚠ *Only in combination with ErgoSeat Pro comfort back CODE 2019*	310 x 125/70 x 140
❑	2032	Thorax cushions, pair, small ⚠ *Only in combination with ErgoSeat Pro comfort back CODE 2019*	230 x 120/60 x 125

09 RECARO-Covers

	CODE	DESCRIPTION
❑	235	ErgoSeat Pro chest pelottes, large, pair

10 Back support options (Adjustments)

	CODE	DESCRIPTION	Adjustments	
❑	814	Continuous push bar		
❑	410	Single push handles incl. stabiliser bar		
❑	2814	Continuous push bar for RECARO seat systems ⚠ *only in combination with RECARO*		
❑	913	Head support, synthetic leather black		
❑	589	Shoulder Harness		
❑	401	Mechanical backrest recline	-10° to 30°	10° increments
❑	25	Powered backrest recline ⚠ *Only i.c.w. control of adjustment motors CODE 682 or CODE 678* *Only i.c.w. tether CODE 833* *It is recommended to use the headrest, imitation leather black (CODE 913)*	-10° to 50°	infinitely variable

☐ Please select by ticking the relevant boxes
Standard version: If no other selection is made, the standard version will be delivered.
S Special construction/individual solution o.r. - on request

11 Arm Supports and Arm Pads

1 = detachable 2 = height adjustable 3 = width adjustable 4 = depth adjustable

	CODE	DESCRIPTION	FUNCTIONS
❑	106	Single post arm support with upholstered arm pad and black clothes guard	1,2,3,4
❑	4960	Single post ,padded armrest, black clothing guard with colour insert and slight trough in arm pad (HEMI - L 380MM)	1,2,3,4
❑	21	Single post padded armrest, black clothing guard with colour insert and angled arm pad, long (L597MM)	1,2,3,4
❑	14	Flip up armrests mounted on the back posts, adjustable in width, height and angle	
❑	4422	Armrest fixation in initial position ⚠ *only i.c.w. armrest CODE 14*	

Armrest hemiplegia

	CODE	DESCRIPTION
❑	4982	Hemiplegia forearm rest, swing-away a. height adjustable ⚠ *only in conjunction with CODE 106, 4960, 21; always on the opposite side to the control module*
❑	4983	Extension for hemiplegia forearm shell ⚠ *only i.c.w. CODE 4982 Hemi forearm support* *For forearm length to the middle of the hand 43cm +/- 2cm*
❑	4985	Hemi hand rest flat
❑	4987	Hemi hand rest with ergonomic handle on the left
❑	4986	Hemi hand rest with ergonomic handle on the right

EPOWER

☐ Please select by ticking the relevant boxes
Standard version: If no other selection is made, the standard version will be delivered.
S Special construction/individual solution o.r. - on request

12 Leg supports

	CODE	DESCRIPTION
❑	93	80° Legrests, detachable and swing-away
❑	92	Elevating Leg supports, (manual) , removable and swing-away ⚠ *not i.c.w.footrest CODE 54*
❑	86	Powered Elevating Legrests, removable and swing-away ⚠ *only i.c.w. operating module R-NET CODE 702* *not i.c.w. footrest CODE 54*

⚠ *Standard abduction +/- 20 mm per side*

Central legrest

Please note that the central legrests are not removable.
Please note the height of the seat cushion: standard seat cushion +60 mm, ErgoSeat +70 mm.

	CODE	DESCRIPTION	LS-ANGLE	LLL
❑	5100	Central legrest, mechanically angle adjustable	85°-95°	280-400 mm
❑	5101	Central legrest, mechanically angle adjustable	85°-95°	330-450 mm
❑	4935	Central legrest, for FSH 440mm, electrically angle- / length-adjustable, ergonomic length compensation up to LS angle 150°. ⚠ *Only i.c.w. control of adjustment motors CODE 682 or CODE 678* *Only i.c.w. calf pad CODE 945* *Not i.c.w. SD 400 mm CODE 615 and SD 560 mm RECARO*	90°-170°	200-360 mm
❑	5104	Central legrest, for VSH 480 mm and 510 mm, electrically angle / length adjustable, ergonomic length compensation up to LS angle 150°. ⚠ *Only i.c.w. control of adjustment motors CODE 682 or CODE 678* *Only i.c.w. calf pad CODE 945* *Not i.c.w. SD 400 mm CODE 615 and SD 560 mm RECARO*	90°-170°	200-360 mm
❑	4949	Central legrest, electrically angle/length adjustable, electrically lowerable to the floor, ergonomic length compensation up to LS angle 150°. ⚠ *Only i.c.w. control of adjustment motors CODE 682 or CODE 678* *Only i.c.w. calf pad CODE 945* *Not i.c.w. SD 400 mm CODE 615 and SD 560 mm RECARO*	90°-170°	330-450 mm

Footplate options for central legrest

	CODE	DESCRIPTION
❑	5108	Standard footplate
❑	5107	Single footplates, separately adjustable ⚠ *not i.c. with code 4949*

☐ Please select by ticking the relevant boxes
Standard version: If no other selection is made, the standard version will be delivered.
S Special construction/individual solution o.r. - on request

13 Footrests for split leg rests

	CODE	DESCRIPTION	depth	LLL
❑	54	One Piece footrest, 60 mm depth adjustable (in 4 steps), flip-up, height and angle adjustable ⚠ *Only i.c.w. legrest Code 93*	150 mm	280-430mm
❑	798	Two-piece footrest flip up, height and angle adjustable	150 mm	280-430mm

⚠ *Lower leg length increases with standard seat cushion +60 mm, ErgoSeat +70mm, RECARO +150 mm*

Leg/foot rest options

	CODE	DESCRIPTION
❑	105	Footboard adapter: abduction +/- 45 mm per side
❑	822	Toe strap (pair)
❑	823	Heel Loops (pair)
❑	945	Calf pad

14 Batteries and Chargers

	CODE	DESCRIPTION	RANGE
❑	5159	Maintenance free batteries approx. 43 Ah (5h), 50 Ah (20h) ⚠ *Not in conjunction with SD 400 mm CODE 615*	10 km/h 25 km / 6 km/h 30 km
❑	5158	Maintenance-free batteries approx.66 Ah (5h), 80 Ah (20h)	10 km/h 35 km / 6 km/h 40 km
❑	732	Charger 8 A for 50 Ah(20h)	
❑	733	Charger 12A recommended for 80 Ah (20 h)	

15 Lighting

	CODE	DESCRIPTION
❑	932	Active LED-lighting front and rear acc. to StVZO

☐ Please select by ticking the relevant boxes
Standard version: If no other selection is made, the standard version will be delivered.
S Special construction/individual solution o.r. - on request

16 Joystick modules and accessories

		CONTROL			
Code	**Control modules**	**none**	**2 / 682**	**6 / 678**	**8 / 780**
408	VR2	❑	❑		
702/415	R-NET LED			❑	
702/416	R-NET LCD			❑	
702/398	R-NET LCD IR/BT			❑	
702/839	R-NET OMNI II			❑	

⚠ *Code 839 OMNI II Flashing function and horn function only selectable via menu*

☐ Please select by ticking the relevant boxes
Standard version: If no other selection is made, the standard version will be delivered.
S Special construction/individual solution o.r. - on request

Joystick Location

	CODE	DESCRIPTION	CONTROLS
❑	74	Assembly right	
❑	60	Assembly left	

software

	CODE	DESCRIPTION
❑	985	Series programming (standard)
❑	998	Special programming (deviation from standard)

17 Joystick Mount

	CODE	DESCRIPTION
❑	4859	Joystick bracket, length adjustable
❑	4566	Joystick bracket, length and height adjustable
❑	4860	Joystick bracket, length and height adjustable, swivelling to the side (e.g. on a table)
❑	4874	Protection bar for Joystick VR2 and R-NET ⚠ *Not in combination with R-NET OMNI II 702/839*
❑	851	Joystick bracket for accompanying person (operating module can be moved from the front to the rear) ⚠ *Only i.c.w. continuous pushing bar CODE 814*
❑	4789	Dual Control Joystick with priority switch for accompanying person, incl. assembly on the frame tube ⚠ *Only i.c.w. continuous pushing bar CODE 814*

☐ Please select by ticking the relevant boxes
Standard version: If no other selection is made, the standard version will be delivered.
S Special construction/individual solution o.r. - on request

18 Special operating modules

Special control modules and special controls often have to be adapted and can therefore generally not be finished products.
Positioning and programming must be carried out with the involvement of the user or by a technician at the user's premises. Other special controls are possible on request.

	CODE	DESCRIPTION
❑	4660	Table plate with recess (centred) for operating module, swivelling to the right
❑	4661	Table plate with recess (centred) for operating module, swivelling to the left
❑	813	Table top control, completely swivelling ⚠ *Only in conjunction with R-NET control module with LED display CODE 702/415*
❑	596	External on/off switch, diameter 63 mm, yellow ⚠ *Only in combination with R-NET LCD CODE 702/416 or R-NRT OMNI II CODE 702/839*
❑	778	External on/off switch, diameter 30 mm, green ⚠ *Only in combination with R-NET LCD CODE 702/416 or R-NRT OMNI II CODE 702/839*
❑	779	External on/off switch, diameter 30 mm, yellow ⚠ *Only in combination with R-NET LCD CODE 702/416 or R-NRT OMNI II CODE 702/839*
❑	4612	MicroGuide way joystick ⚠ *only in combination with R-NET OMNI II CODE 702/839* *temporarily not available*
❑	4601	MicroGuide way joystick including bracket and hand pad ⚠ *only in combination with R-NET OMNI II CODE 702/839* *temporarily not available*

external on/off button for users who have difficulty operating the buttons on the control module or as an emergency off function for accompanying person

☐ Please select by ticking the relevant boxes
S Special construction/individual solution o.r. - on request
Standard version: If no other selection is made, the standard version will be delivered.

Joystick attachments

	CODE	DESCRIPTION
❑	553	Tetra-fork vertical
❑	556	Tetra-fork horizontal
❑	734	Tetra-fork horizontal, adjustable to hand width
❑	4589	Mushroom grip
❑	4590	Ball grip
❑	4591	T-grip
❑	4593	Stem grip
❑	4594	Button grip
❑	4595	Softball
❑	4596	Golf ball d=43 mm small

19 Frame colours / accent colours

	CODE	FRAME	AKZENTE
❑	207	Matt black	
❑	212	Matt black	Polar white
❑	186	Matt black	Magic Blue
❑	227	Matt black	Red metallic
❑	180	Matt black	Lemon reflex
❑	214	Matt black	Sun yellow

☐ Please select by ticking the relevant boxes
Standard version: If no other selection is made, the standard version will be delivered.
S Special construction/individual solution o.r. - on request

20 Options around the wheelchair

	CODE	DESCRIPTION
❑	906	Rear-view mirror right
❑	927	Rear-view mirror left
❑	970	Crutch holder
❑	4795	Anti-theft function, key ⚠ *only i.c. with R-Net*
❑	833	Safety belt (metal buckle)
❑	4646	Therapy table swivelling sideways
❑	590	Abduction wedge ⚠ *only in conjunction with seat pan CODE 4276 or ErgoSeat CODE 948*
❑	260	Memory-function for head support
❑	957	Lateral / Torso supports, Rigid(pair)
❑	954	Lateral / Torso supports, swing away (pair)
❑	781	USB charging socket
❑	782	Receptacle for mobile phone bracket ⚠ *not in conjunction with R-NET OMNI II CODE 839 Cell phone holder not included in scope of delivery*
❑	4772	TÜV certificate
❑	2676	Warning sign sticker ⚠ *only in conjunction with ErgoSeat*
❑	676	Rear marking plate

21 Service

	CODE	Item	DESCRIPTION
❑		55704	Flat fee for customised parameterisation (not eligible for discounts)

⚠ *The on-the-spot service covers only simple adjustment of parameter sets, such as acceleration, speed etc.*

EPOWER