iCHAIR MC2 RS

1.615

Allowed user weight

160 kg (incl. additional load)



MEYRA GROUP



15" drive wheels



Side Panel lighting with individual engraving



RS design black-red



Recaro seat in black Imitation leather

Extraordinarily sporty

EFFICIENCY

- Effectiveness through simple maintenance and a high level of service friendliness
- Little need for repairs by implementing high value and durable parts
- Modular structure of the iChair-family enables compatibility of parts and parts groups
- Numerous adjustment options allow individual adaptation
- Simplified reinstallment through perfect user size limitations, as for example a standard user weight of 160 kg

THERAPEUTIC BENEFIT

- Ideal for retaining mobility at home, at the desk or in the office
- Effective pressure relief and relaxing positioning for long term sitting, through large electric adjustment sectors
- Different seat systems according to the individual demands

FIELD OF USE

- For indoor and outdoor use
- For permanent and all-day use for independent mobility, also with extreme functional limitations
- For working and active people, who need one wheelchair for different everyday situations
- Indoor spaces can easily be mastered due to the compact dimensions and high level of agility
- Suitable for outdoor use thanks to standard large tyres and optionally available 13 km/h version

● ORDER ❍ COST ESTIMATE ❍ CUSTOM DESIGN

Please send the order form by e-mail to: info@meyragroup.com **Customer service:** +49 571 93292 555

Billing address / Customer ref. no.:

Delivery address:

Tax-ID

Consignment / Comments:

Order quantity:



Allowed user weight
160 kg (incl. additional load)

Hints
Our Terms and Conditions as stated at www.meyra.de/AGB shall apply
You can find information on the measurement process at www.meyra.de/messverfahren

Valid from 01.01.2026 – 31.12.2026.
Errors, misprints and changes reserved.

Use our K.I.S.S.S. for orders and configurations at www.kisss-by-meyra.de
You avoid queries and incorrect orders thanks to the buildability check

EPOWER

USER DATA

First name

Name

Street

ZIP CODE

City

Country

Birthday

Diagnosis 1

Diagnosis 2

Tel.

Mobil

E-mail

Order number

Health insurance fund / cost unit

Specialist trade Contact person/phone.

Supply specialist MEYRA

Approval info from week

ANATOMICAL DATA (IN MM)

1) Seat depth

2) Seat width

3) Chest width

4) Chest depth

5) Elbow height

6) Armpit height

7) Back height


8) Head height

9) Forearm length

10) LLL

Body height

Weight (kg)

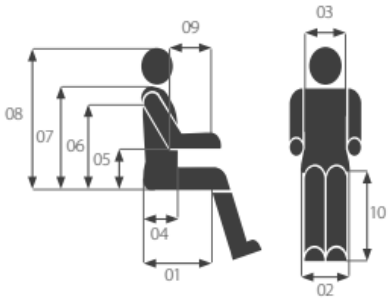

Remarks

❑ I accept the Terms and Conditions of Meyra Distribution GmbH (valid as of January 2023)
https://www.meyra.com/gtc/

Date City Signature

EPOWER

Technical specifications

1) see category seat width
2) seating Systems ErgoSeat / RECARO seat angle 4°
3) seating System ErgoSeat
4) 120 mm incl. step climber
5) without legrests and without armrests
6) see category 00 chassis/motor
7) The adjustment range may deviate by max. +/-3° depending on SH and castor wheel size

Seat widths in mm	360 - 650 [1) 2)]
Seat depth in mm	400 – 560 / 480 – 530 [2)]
Back support height in mm	530 – 570 / 640 [2)]
Lower shank length in mm	350 – 500 / 350 – 500 [2)]
Arm support height in mm	180 – 290 / 180 – 290 [2)]
Front seat height in mm	530 – 600 / 580 – 650 [2)]
Length with footrest in mm	1130
Length without footrests in mm	830
Width ready to drive in mm from	635 [3)]
Height without head support in mm	1010 - 1130 [3)]
Transport length in mm	830
Transport height min. in mm	590 - 660
Front wheel size in mm	260 x 70 (10")
Rear wheel size in mm	380 x 75 (15")
Max. obstacle height in mm	60 [4)]
Turning radius in mm	840
Transport empty weight basic configuration min.	100 kg [5)]
User weight	160 kg
Permitted overall weight incl. options	320 kg
Max. additional loading	10 kg
Driving speed	6 / 13 km/h
Motor power	2 x 300 W / 2 x 350 W
Range with battery 63 Ah (5h), 80 Ah (20h)	Max. 35 - 40 km [6)]
Permitted inclination/slopes	8,5° (15%)
Form of steering	indirect
Seat camber electric	-2° to 26° / 0° to 50° [7)]
Seat camber mechanical	0° to 10°
Electrically adjustable backrest angle	80° - 140° (Code 25)
Mechanical backrest angle	80° - 120° (Code 401)
Drive	Rear

☐ Please select by ticking the relevant boxes
Standard version: If no other selection is made, the standard version will be delivered.
S Special construction/individual solution o.r. - on request

00 Chassis/Motorisation

	CODE	SPEED	RANGE	MOTOR POWER
❑	115	6 km/h	max. 40 km	2 x 300 W
❑	120	13 km/h	max. 35 km	2 x 350 W
❑	918	ESP drive stabilisation module (GYRO) ⚠ *ESP driving stabilization module, only in conjunction with R-Net / LCD color display or i.V.m. OMNI II (CODE 839)*		

Chassis options

	CODE	DESCRIPTION
❑	892	Standard suspension for user weight up to 120 kg
❑	891	Reinforced suspension for user weight 120 - 160 kg

01 Seat width (SW)

	CODE	DESCRIPTION	SEAT SURFACE WIDTH
❑	38	SW continuously adjustable from 380 to 500 mm through the arm supports	380 mm
❑	43	SW continuously adjustable from 430 to 550 mm through the arm supports	430 mm
❑	48	SW continuously adjustable from 480 to 600 mm through the arm supports ⚠ *only i.c. with FSH 500 or FSH 530*	480 mm
❑	53	SW continuously adjustable from 530 to 650 mm through the arm supports ⚠ *only i.c. with FSH 500 or FSH 530*	530 mm

02 Front seat height (FSH) in combination with castor wheel (without seat cushion)

				Front Seat Height (FSH) in mm		
Code	Ø	rim	Tyres	460	500	530
142/146	10"			❑	❑	❑
142/900	10"			❑	❑	❑
2142/900	10"			❑	❑	❑

EPOWER

☐ Please select by ticking the relevant boxes
Standard version: If no other selection is made, the standard version will be delivered.
S Special construction/individual solution o.r. - on request

Steering wheel options

	CODE	DESCRIPTION
❑	816	Mud guard for Castor wheels ⚠ *Not in combination with CODE 2142 Wide cross tyre with lug tread*

03 Drive wheels

			Pneumatic tyres/cleat profile CODE 482	*Pannensichere Bereifung/Stollenprofil CODE 905
Code	Ø	rim	black	black
772	15"	Aluminium rim	❑	❑
2460	14"	Aluminum rim CROSS	❑	❑

Rear wheel options

	CODE	DESCRIPTION
❑	824	Mudguard for drive wheels, Curved ⚠ *Not in combination with Code 2460 Wide 14" cross tyre with lug tread*

05 Seat Tilt

	CODE	DESCRIPTION	Seat angle
❑	119	Mechanic seat tilt, in steps	0° to +10°
❑	118	Powered seat tilt continuously by 28 degrees	-2° to +26°
❑	4118	Powered seat tilt stepless by 50 degrees ⚠ *The seat depth 56 cm CODE 356 is not possible in combination with ErgoSeat backrest CODE 949* *Only in conjunction with adjustment module VR2 CODE 682 or R-Net CODE 702*	0° to 50°
❑	27	Scissor-lift 300 mm incl. tilt module	0° to 30°

06 Seat depth (SD)

	(C-615)	(C-788)	(C-619)	(C-792)	(C-793)	(C-356)
	400 mm	430 mm	460 mm	490 mm	530 mm	560 mm
Seat depth (SD)	❑	❑	❑	❑	❑	❑

EPOWER

☐ Please select by ticking the relevant boxes
S Special construction/individual solution o.r. - on request
Standard version: If no other selection is made, the standard version will be delivered.

07 Seat system

	CODE	DESCRIPTION
❑	4276	Seat plate without cushion
❑	948	Ergo Seat cushion
❑	7206	Netti Uno Seat cushion
❑	7203	Netti Sit cushion

⚠ *Netti and Ride not i.c. with SD 560 mm*

08 Back systems

	CODE	DESCRIPTION	BACK HEIGHT
❑	608	Round tube back posts, 22 mm, incl. continuous push bar ⚠ *prepared for external back systems*	
❑	735	Tension adjustable back strap without padding/back cover.	500 mm, convertible to 450 mm
❑	736	Tension adjustable back strap with padding / back cover.	500 mm, convertible to 450 mm
❑	949	ErgoSeat back,	590 mm, convertible to 630 mm
❑	2019	ErgoSeat Pro comfort back including overlay cushion ⚠ *Only i.c. with SW 430 and 480 mm*	590 mm, convertible to 630 mm
❑	7201	Netti Uno Back rest	620 mm, convertible to 670 mm
❑	7209	Netti Smart Back rest	620 mm, convertible to 670 mm
❑	7207	Netti Stabil Back rest	620 mm, convertible to 670 mm
❑	7210	Netti Super Stabil Back rest	620 mm, convertible to 670 mm
❑	7205	Netti Kyphotic Back rest ⚠ *Not in conjunction with SW 530 mm*	620 mm, convertible to 670 mm

☐ Please select by ticking the relevant boxes
Standard version: If no other selection is made, the standard version will be delivered.
S Special construction/individual solution o.r. - on request

09 Optional seat units

Please consider the front height of the seat cushion: ERGOSTAR + 120 mm and RECARO + 150 mm

		Backrest	
CODE	Seat unit	mechanical	electric
961	ERGOSTAR anatomically formed seat system	❑	
579/567	RECARO S/F short seat with little side surface	❑	❑
580/578	RECARO M/W long seat with very long side bolsters	❑	❑
581/584	RECARO L/X long seat with pronounced lateral guidance	❑	❑

ERGOSTAR seat CODE 961 is only possible with seat width 48 cm
Electric backrest adjustment only in conjunction with R-Net control
Longer delivery time for RECARO seats

ErgoSeat-covers

	CODE	DESCRIPTION
❑	297	ErgoSeat-cover, netting, RS design red/black
❑	4980	ErgoSeat-cover, incontinenc, black

ErgoSeatPRO accessory back

	CODE	DESCRIPTION
❑	2021	Thorax cushions, pair, large
❑	2032	Thorax cushions, pair, small

Recaro remuneration

	CODE	DESCRIPTION
❑	235	Recaro cover, textile, black

☐ Please select by ticking the relevant boxes
Standard version: If no other selection is made, the standard version will be delivered.
S Special construction/individual solution o.r. - on request

10 Back support options (Adjustments)

	CODE	DESCRIPTION
❑	814	Continuous push bar
❑	410	Single push handles incl. stabiliser bar
❑	2814	Continuous push bar for RECARO seat systems ⚠ *only in combination with RECARO*
❑	913	Head support, synthetic leather black
❑	589	4-point-strap
❑	401	Mechanical backrest recline
❑	25	Powered backrest recline ⚠ *It is recommended to use the headrest, imitation leather black (CODE 913).*

11 Arm Supports and Arm Pads

1 = detachable 2 = height adjustable 3 = width adjustable 4 = depth adjustable

	CODE	DESCRIPTION	FUNCTIONS
❑	106	Single post arm support with upholstered arm pad and black clothes guard	1,2,3,4
❑	4960	Single post arm support with upholstered arm support, satined clothes guard and slight depression in the padded arm support	1,2,3,4
❑	21	Single post arm support with upholstered arm support, satined clothes guard and long angled padded arm support	1,2,3,4
❑	24	Arm support with padded arm support, swivelling and angle adjustable Differing arm support height 190 - 230 mm ⚠ *Only i.c. with operating module bracket CODE 4859*	2
❑	769	Satined clothes guard without arm support ⚠ *only i.c. with arm support CODE 24*	

Armrest hemiplegia

	CODE	DESCRIPTION
❑	4982	Hemiplegia forearm rest, swing-away a. height adjustable ⚠ *not in conjunction with CODE 24 flip-up armrest* *for forearm- length to centre of hand 36cm +/- 2cm*
❑	4983	Extension for hemiplegia forearm shell ⚠ *only in conjunction with CODE 4983 Hemi-Forearm shell to centre of hand 43cm +/- 2cm*

☐ Please select by ticking the relevant boxes
Standard version: If no other selection is made, the standard version will be delivered.
S Special construction/individual solution o.r. - on request

Hand Rest Hemiplegia

	CODE	DESCRIPTION
❑	4985	Hemi hand rest flat
❑	4987	Hemi hand rest with ergonomic handle on the left
❑	4986	Hemi hand rest with ergonomic handle on the right

12 Leg supports

	CODE	DESCRIPTION
❑	93	80° Legrests, detachable and swing-away
❑	92	Elevating Leg supports, (manual) , removable and swing-away ⚠ *not i.c.w.footrest CODE 54*
❑	86	Powered Elevating Legrests, removable and swing-away ⚠ *not i.c.w.footrest CODE 54*

13 Footrests

	CODE	DESCRIPTION	depth	LLL
❑	798	Two-piece footrest flip up, height and angle adjustable	150 mm	280-430mm
❑	54	One Piece footrest, 60 mm depth adjustable (in 4 steps), flip-up, height and angle adjustable ⚠ *Only i.c.w. legrest Code 93*	150 mm	280-430mm
❑	822	Toe strap (pair)		
❑	823	Heel Loops (pair)		

14 Batteries and Chargers

	CODE	DESCRIPTION	RANGE
❑	5158	Maintenance-free batteries approx.66 Ah (5h), 80 Ah (20h)	40 km
❑	733	Charger 12 A	

15 Lighting

	CODE	DESCRIPTION
❑	932	Active LED-lighting front and rear acc. to StVZO

☐ Please select by ticking the relevant boxes
Standard version: If no other selection is made, the standard version will be delivered.
S Special construction/individual solution o.r. - on request

16 Joystick modules and accessories

		CONTROL			
Code	Control modules	none	2 / 682	6 / 678	8 / 780
702/415	R-NET LED			❑	
702/416	R-NET LCD			❑	
702/398	R-NET LCD IR/BT			❑	
702/839	R-NET OMNI II			❑	

⚠ *Code 839 OMNI II Flashing function and horn function only selectable via menu*

Joystick Location

	CODE	DESCRIPTION
❑	74	Assembly right
❑	60	Assembly left

17 Joystick Mount

	CODE	DESCRIPTION
❑	4859	Joystick bracket, length adjustable
❑	4566	Joystick bracket, length and height adjustable
❑	4860	Joystick bracket, length and height adjustable, swivelling to the side (e.g. on a table)
❑	4874	Protection bar for Joystick VR2 and R-NET
❑	851	Joystick bracket for accompanying person (operating module can be moved from the front to the rear) ⚠ *Only i.c.w. continuous pushing bar CODE 814*

18 Special operating modules

	CODE	DESCRIPTION
❑	4660	Table plate with recess (centred) for operating module, swivelling to the right
❑	4661	Table plate with recess (centred) for operating module, swivelling to the left
❑	4789	Dual Control Joystick with priority switch for accompanying person, incl. assembly on the frame tube

☐ Please select by ticking the relevant boxes
Standard version: If no other selection is made, the standard version will be delivered.
S Special construction/individual solution o.r. - on request

External on/off switch

for users who can hardly operate the keys of the operating module or as an emergency/off function for accompanying person

	CODE	DESCRIPTION
❑	596	External on/off switch, diameter 63 mm, yellow
❑	778	External on/off switch, diameter 30 mm, green
❑	779	External on/off switch, diameter 30 mm, yellow

⚠ *Only i.c.w. joystick module R-NET with LED-Display CODE 702/416 or OMNI II Surround control CODE 839*

Others

	CODE	DESCRIPTION
❑	4612	MicroGuide way joystick ⚠ *only in combination with R-NET OMNI II CODE 702/839* *temporarily not available*
❑	4601	MicroGuide way joystick including bracket and hand pad ⚠ *only in combination with R-NET OMNI II CODE 702/839* *temporarily not available*

Joystick attachments

	CODE	DESCRIPTION
❑	553	Tetra-fork vertical
❑	556	Tetra-fork horizontal
❑	734	Tetra-fork horizontal, adjustable to hand width
❑	4589	Mushroom grip
❑	4590	Ball grip
❑	4591	T-grip
❑	4593	Stem grip
❑	4594	Button grip
❑	4595	Softball
❑	4596	Golf ball d=43 mm

☐ Please select by ticking the relevant boxes
S Special construction/individual solution o.r. - on request
Standard version: If no other selection is made, the standard version will be delivered.

19 Frame Colours

	CODE	DESCRIPTION
❑	207	black matte incl. RS- colouring, red elements

20 Options around the wheelchair

	CODE	DESCRIPTION
❑	676	Rear marking plate
❑	906	Rear-view mirror right
❑	927	Rear-view mirror left
❑	994	Baggage rack with metal rods
❑	970	Crutch holder
❑	589	Shoulder Harness
❑	833	Safety belt (metal buckle)
❑	721	Lap belt - buckle
❑	4646	Therapy table swivelling sideways
❑	862	Kerb climber ⚠ *not in conjunction with CODE 27 scissor lift incl. seat tilt*
❑	957	Lateral / Torso supports, Rigid(pair)
❑	954	Lateral / Torso supports, swing away (pair) ⚠ *Not i.c.w. arm supports CODE 24*
❑	781	USB charging socket
❑	782	Universal adapter for mounting mobile phone holders ⚠ *not in conjunction with R-NET OMNI II CODE 702/839 Cell phone holder not included in scope of delivery*
❑	4795	Anti-theft function, key ⚠ *only i.c. with R-Net*

21 software

	CODE	DESCRIPTION
❑	985	Series programming (standard)
❑	998	Special programming (deviation from standard)

EPOWER

☐ Please select by ticking the relevant boxes
Ⓢ Special construction/individual solution o.r. - on request
Standard version: If no other selection is made, the standard version will be delivered.

22 Service

	Item	DESCRIPTION
❑	55704	Flat fee for customised parameterisation (not eligible for discounts) ⚠ *The on-the-spot service covers only simple adjustment of parameter sets, such as acceleration, speed etc.*