FLASH

1.135

Allowed user weight

75 kg



MEYRA GROUP



Anatomical back shell, removable



Trendy design



Perfect adjustment of lower leg length



Ultra flexible- a seat that grows with you

The rolling lightning

EFFICIENCY

- "Grow with you" wheelchair design reduces care costs
- Great versatility when it comes to adjusting the sitting position and the handling characteristics
- Rapid, long-term supply of spare parts thanks to extensive network of specialist retailers
- Excellent possibilities for reuse

THERAPEUTIC BENEFIT

- Flexible seat unit for perfect adjustment to the individual measurements of the child
- Adapter allows adjustment of seat depth to the front
- Telescopic back unit for adjustment of 45 mm to the back; ideal for seat shell care
- Low weight, anatomical seat unit and maximum variability for ideal handling
- Enormous amount of leg room at the front due to standard abduction frame
- Very easy to adjust to any necessary changes resulting from growth or a change in functions
- Length for calf progressively adjustable up to 200 mm

FIELD OF USE

- For active children and youths
- For domestic use and leisure activities
- For children of kindergarten, pre-school and school age

● ORDER ❍ COST ESTIMATE ❍ CUSTOM DESIGN

Please send the order form by e-mail to: info@meyragroup.com **Customer service:** +49 571 93292 555

Billing address / Customer ref. no.:

Delivery address:

Tax-ID

Consignment / Comments:

Order quantity:



Allowed user weight
75 kg

Hints
Our Terms and Conditions as stated at www.meyra.de/AGB shall apply
You can find information on the measurement process at www.meyra.de/messverfahren
When transported in public transport (e.g. train), the dimensions of the wheelchair may be higher than the guide values of the transport company. Please inquire in advance.

Valid from 01.01.2026 – 31.12.2026.
Errors, misprints and changes reserved.

Use our K.I.S.S.S. for orders and configurations at www.kisss-by-meyra.de
You avoid queries and incorrect orders thanks to the buildability check

KIDS

USER DATA

First name

Name

Street

ZIP CODE

City

Country

Birthday

Diagnosis 1

Diagnosis 2

Tel.

Mobil

E-mail

Order number

Health insurance fund / cost unit

Specialist trade Contact person/phone.

Supply specialist MEYRA

Approval info from week

ANATOMICAL DATA (IN MM)

1) Seat depth

2) Seat width

3) Chest width

4) Chest depth

5) Elbow height

6) Armpit height

7) Back height


8) Head height

9) Forearm length

10) LLL

Body height

Weight (kg)

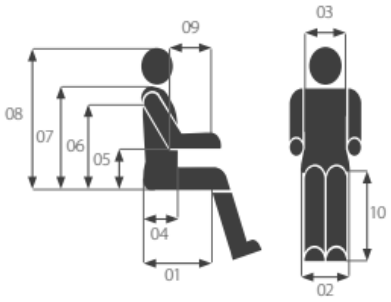

Remarks

❑ I accept the Terms and Conditions of Meyra Distribution GmbH (valid as of January 2023)
https://www.meyra.com/gtc/

Date City Signature

KIDS

Technical specifications

	MIDI	MAXI
Seat widths in mm	240 - 300	240 - 400
Width ready to drive in mm from		Seat widths + 180 (0°) / + 220 (3°) / + 260 (6°)
Seat depth in mm	240 - 300	320 - 400
Overall height in mm		rear seat height + back height + 40
Back support height in mm		250 - 400
Backrest Angle		75° - 105°
Lower shank length in mm	200 - 290	250 - 320 / 330 - 440
Length with footrest in mm	670 - 745	855 - 930
User weight		75 kg
Empty weight from		10 kg
Permitted total weight in kg		90 kg
Transport weight		8 kg
Rear wheel		550 (22") / 600 (24")
Brake test according to STANDARD		7°

☐ Please select by ticking the relevant boxes
Standard version: If no other selection is made, the standard version will be delivered.
S Special construction/individual solution o.r. - on request

00 Seat width/-depth and frame design

Seat width (SW)		Frame length MIDI, seat depth in mm				Frame length MAXI, seat depth in mm				
Seat belt	Seaty cushion/Shell	240	260	280	300	320	340	360	380	400
240 mm	210 mm 200 mm	❑ (67/124/351/524)	❑ (67/124/351/526)	❑ (67/124/351/528)	❑ (67/124/351/390)	❑ (61/124/352/392)	❑ (61/124/352/394)	❑ (61/124/352/366)	❑ (61/124/352/368)	❑ (61/124/352/615)
260 mm	230 mm 220 mm	❑ (67/126/351/524)	❑ (67/126/351/526)	❑ (67/126/351/528)	❑ (67/126/351/390)	❑ (61/126/352/392)	❑ (61/126/352/394)	❑ (61/126/352/366)	❑ (61/126/352/368)	❑ (61/126/352/615)
280 mm	250 mm 240 mm	❑ (28/67/351/524)	❑ (28/67/351/526)	❑ (28/67/351/528)	❑ (28/67/351/390)	❑ (28/61/352/392)	❑ (28/61/352/394)	❑ (28/61/352/366)	❑ (28/61/352/368)	❑ (28/61/352/615)
300 mm	270 mm 260 mm	❑ (30/67/351/524)	❑ (30/67/351/526)	❑ (30/67/351/528)	❑ (30/67/351/390)	❑ (30/61/352/392)	❑ (30/61/352/394)	❑ (30/61/352/366)	❑ (30/61/352/368)	❑ (30/61/352/615)
320 mm	290 mm 280 mm					❑ (32/61/352/392)	❑ (32/61/352/394)	❑ (32/61/352/366)	❑ (32/61/352/368)	❑ (32/61/352/615)
340 mm	310 mm 300 mm					❑ (34/61/352/392)	❑ (34/61/352/394)	❑ (34/61/352/366)	❑ (34/61/352/368)	❑ (34/61/352/615)
360 mm	330 mm 320 mm					❑ (36/61/352/392)	❑ (36/61/352/394)	❑ (36/61/352/366)	❑ (36/61/352/368)	❑ (36/61/352/615)
380 mm	350 mm 340 mm					❑ (38/61/352/392)	❑ (38/61/352/394)	❑ (38/61/352/366)	❑ (38/61/352/368)	❑ (38/61/352/615)
400 mm	370 mm 360 mm					❑ (40/61/352/392)	❑ (40/61/352/394)	❑ (40/61/352/366)	❑ (40/61/352/368)	❑ (40/61/352/615)

02 Front seat height (FSH) in combination with castor wheel (without seat cushion)

		Front Seat Height (FSH) in mm									
Code	Castor	390	400	410	420	430	440	450	460	470	480
151	Ø 100 Solid rubber	❑	❑	❑	❑	❑	❑	❑	❑		
153	Ø 125 Solid rubber			❑	❑	❑	❑	❑	❑	❑	
327	Ø 142 Soft solid rubber					❑	❑	❑	❑	❑	❑
1068963	Ø 100 Lightwheel	❑	❑	❑	❑	❑	❑	❑	❑		
1072385	Ø 100 Castor wheel aluminium silver	❑	❑	❑	❑	❑	❑	❑	❑		
1072386	Ø 125 Castor wheel aluminium silver			❑	❑	❑	❑	❑	❑	❑	

☐ Please select by ticking the relevant boxes
S Special construction/individual solution o.r. - on request
Standard version: If no other selection is made, the standard version will be delivered.

Drive wheels in combination with seat height
When selecting frame length MIDI

RSH (mm)	360	380	400	420	440
A	❑	❑	❑	❑	❑

	CODE	RSH (mm)	DESCRIPTION	Ø
❑	651	A	Standard wheel including quick-release axle, pair	22"
❑	706	A	Drum brake wheel	22"
❑	752	A	Lightweight wheel including quick-release axle	22"

When selecting frame length MAXI

RSH (mm)	390	410	430	450	470
B	❑	❑	❑	❑	❑

	CODE	RSH (mm)	DESCRIPTION	Ø
❑	651	B	Standard wheel including quick-release axle	24"
❑	706	B	Drum brake wheel	24"
❑	752	B	Lightweight wheel including quick-release axle	24"

Rear wheels X-Trends

RSH (mm)	400	420	440	460	480
C	❑	❑	❑	❑	❑

	Item	RSH (mm)	DESCRIPTION	Ø
❑	1068705	C	Six-Star incl. 8 bar high pressure tyres and aluminium handrim	24x1"
❑	1068707	C	CROSS-wheel incl. aluminium rim and rough cleat profile tyres and stainless steel handrim	24x1.75"

05 Horizontal rear wheel position (center of gravity)

	ACTIVE	MEDIUM		PASSIVE
Position/Distance	**1 / 70 mm**	**2 / 55 mm**	**3 / 40 mm**	**4 / 25 mm**
Selection	❑	❑	❑	❑

☐ Please select by ticking the relevant boxes
Standard version: If no other selection is made, the standard version will be delivered.
S Special construction/individual solution o.r. - on request

06 Camber

	CODE	DESCRIPTION
❑	423	0° wheel camber
❑	447	3° Wheel camber
❑	454	6° Wheel camber

07 Handrims and handrim options (not combinable with X-Trends wheels)

	CODE	DESCRIPTION	Ø	Ø
❑	493	Stainless steel, polished	-	24"
❑	494	Aluminium, silver anodised ⚠ *Not in combination with active wheel CODE 695*	22"	24"
❑	168	Optigripp-special push rim for tetraplegics	-	24"
❑	492	Maxgrepp Ergo ⚠ *Only in combination with 15 mm hand rim gap CODE 692* *Not in combination with spoke guard*	22"	24"
❑	166	Silicon hand rim cover, smooth, black	22"	24"
❑	692	Handrim distance 15 mm	22"	24"
❑	693	Handrim distance 25 mm	22"	24"

08 Tyres (not combinable with X-Trends wheels)

	CODE	DESCRIPTION	Ø	Ø
❑	496	High pressure tyre 8 bar	22x1"	24x1"
❑	902	PU-tyres, puncture safe ⚠ *Not in combination with active wheel CODE 695*	22x1"	24x1"
❑	897	Marathon-Plus-Evolution tyres, puncture protected	22x1"	24x1"

☐ Please select by ticking the relevant boxes
Standard version: If no other selection is made, the standard version will be delivered.
S Special construction/individual solution o.r. - on request

09 Brake

	CODE	DESCRIPTION
❑	305	Pressure brake for user
❑	681	Brake lever extension

10 Backrest height

	BH	225	250	275	300	325	350	375	400	425
	A	❑	❑	❑						
	B			❑	❑	❑				
	C					❑	❑	❑		
	D							❑	❑	❑

	CODE	BH	DESCRIPTION
❑	620	A	Back strap height 250 mm, adjustable +/-25 mm ⚠ *adjustable not in conjunction with CODE 29 back +/- 15° angle adjustable*
❑	625	B	Back strap height 300 mm, adjustable +/- 25 mm ⚠ *adjustable not in conjunction with CODE 29 back +/- 15° angle adjustable*
❑	631	C	Back strap height 350 mm, adjustable +/- 25 mm ⚠ *adjustable not in conjunction with CODE 29 back +/- 15° angle adjustable*
❑	632	D	Back strap height 400 mm, adjustable +/- 25 mm ⚠ *adjustable not in conjunction with CODE 29 back +/- 15° angle adjustable*

☐ Please select by ticking the relevant boxes
Standard version: If no other selection is made, the standard version will be delivered.
(S) Special construction/individual solution o.r. - on request

11 Seat-/back system

	Back systems				
Seat system	**without backrest cover**	**Adjustable back**	**Aluminium back shell**	**Aluminium back shell/- cushion shaped**	**SEATY**
Seat belt	❑ (593)	❑ (735)	❑ (940)	❑ (940/949)	
Seat belt/-cushion	❑ (560/593)	❑ (560/735)	❑ (560/940)	❑ (560/940/949)	
anatomically formed seat			❑ (940/948)	❑ (940/948/949)	
SEATY padding	❑ (593/4976)	❑ (735/4976)			
SEATY Shell SW 240-300mm					❑ (4976/4977)
SEATY Shell SW 320-400mm					❑ (4976/4977)

Curve depth

Only relevant when selecting aluminium back shell CODE 940

MT (mm)	15	25	35
(A)	❑	❑	❑

	CODE	MT (mm)	DESCRIPTION
❑		(A)	Select trough depth in mm

Seaty adjustment

Seaty increases the seat height by 30 mm.
For Seaty seat cushion, the SW wheelchair is calculated from SW Seaty + 30 mm.
For Seaty seat cushion, the SW wheelchair is calculated from SW Seaty + 40 mm.

Seat width in mm: **Seat depth in mm:** **Back height in mm:**

☐ Please select by ticking the relevant boxes
Standard version: If no other selection is made, the standard version will be delivered.
S Special construction/individual solution o.r. - on request

Seaty cover fabrics colours

	Black	Dark blue	Light blue
Seaty cover fabrics colours	❑	❑	❑

12 Backrest

	CODE	DESCRIPTION
❑	410	Back with push handle ⚠ *Not in combination with drum brake CODE 706*
❑	502	Push handle, mounted on the back tube, progressive height adjustment up to 300 mm
❑	29	Back, +/- 15°, angle-adjustable in 5° increments, incl. push handle CODE 502

Backrest options

	CODE	DESCRIPTION
❑	913	Head support, removable, height-, angle-, depth adjustable ⚠ *Only in conjunction with push handles CODE 502*

13 Arm Supports and Arm Pads

*1 = fest verschraubt 2 = hochschwenkbar 3 = abnehmbar 4 = verriegelbar 5 = Armlehne höhenverstellbar 6 = mit Radüberdeckung

	CODE	DESCRIPTION	FUNCTIONS
❑	100	Aluminum arm support in frame colour with carbon insert	1,6
❑	748	Aluminium arm support in frame colour with carbon insert, incl. height adjustable arm support ⚠ *Not in combination with Light pressure brake CODE 595*	1,5,6
❑	302	Aluminium Light arm support in frame colour	1

☐ Please select by ticking the relevant boxes
Standard version: If no other selection is made, the standard version will be delivered.
S Special construction/individual solution o.r. - on request

14 Leg supports and footrests

	LLL (mm)	200	210	220	230	240	250	260	270	280	290	300	310	320	330	340	350	360	370	380	390	400	410	420	430	440
	A	❑	❑	❑	❑	❑	❑	❑	❑	❑	❑															
	B						❑	❑	❑	❑	❑	❑	❑	❑												
	C														❑	❑	❑	❑	❑	❑	❑	❑	❑	❑	❑	❑

	CODE	LLL (mm)	DESCRIPTION	depth	FL
❑	55/128	A	One-piece footrests, can be folded up to the side, adjustable height, depth and angle, for short lower leg lengths ⚠ *Only in combination with MIDI frame type CODE 351*	200 mm	MIDI
❑	55/128	B	One-piece footrest, flip-up to the side, height-, depth- and angle-adjustable for long lower leg length ⚠ *only in combination with Maxi frame CODE 352*	200 mm	MAXI
❑	55/762	C	One-piece footrests, can be folded up to the side, adjustable height, depth and angle for long lower leg lengths ⚠ *only in combination with Maxi frame CODE 352*	200 mm	MAXI

Footrests options

	CODE	DESCRIPTION
❑	359	Calf belt
❑	664	Footrest locking mechanism
❑	822	Toe strap (pair)
❑	823	Heal ledge

15 Frame Colours

	CODE	DESCRIPTION
❑	4922	Metallic green
❑	4066	Tornado red
❑	206	Matt black
❑	224	Blue metallic
❑	189	Violetstar

☐ Please select by ticking the relevant boxes
Standard version: If no other selection is made, the standard version will be delivered.
S Special construction/individual solution o.r. - on request

Seat and back strap colours

	CODE	DESCRIPTION
❑	235	Textil black
❑	292	Mesh fabric, breathable , black

16 Hand and spoke guard

	CODE	DESCRIPTION
❑	489	Transparent
❑	4974	Transparent with flash lettering

17 Support castors

	CODE	DESCRIPTION
❑	728	Anti-Tip, 1 pair, swivelling (recommended) ⚠ *Not in combination with step bar CODE 309*
❑	729	1 anti-tip, swivelling, mounted left
❑	730	1 anti-tip, swivelling, mounted right

18 Pedal tubes

	CODE	DESCRIPTION
❑	309	step bar, 1 pc. ⚠ *not in combination with anti-tip wheels CODE 728*

☐ Please select by ticking the relevant boxes
Standard version: If no other selection is made, the standard version will be delivered.
S Special construction/individual solution o.r. - on request

19 Options

	CODE	DESCRIPTION
❑	679	Folding lock
❑	833	Safety belt (metal buckle)
❑	970	Crutch holder ⚠ *Only in combination with step bar CODE 309*
❑	819	Reflectors
❑	929	Plastic therapy table, transparent, adjustable ⚠ *Only in combination with side guard, CODE 748*
❑	35	Seat width increased by 10 mm on each side ⚠ *(included loose)*

Xtrend Options

	Item	DESCRIPTION	HMV
❑	261519300	X-TREME Backpack	
❑	261519600	Wheel pouch „BLACK WHEEL CASE“ fitting for max. 2 x 24“ wheels resp. each 1 x 25“ or 26“ wheel	18.99.99.0999
❑	206964600	3M Spoke reflectors	18.99.99.0999